

Clamps for fire protection installation




Wall installation

Recommended installation spacing is 8-10 m, (26-33 ft).

RSB®-clips, screws, washers and plugs are made of stainless steel.

For the installation of the plugs use only the setting tool Tool-2.

Recommended drilling hole for PLUG-8-2: Ø 10 x 35 mm, (Ø 0.39 x 1.38 in).

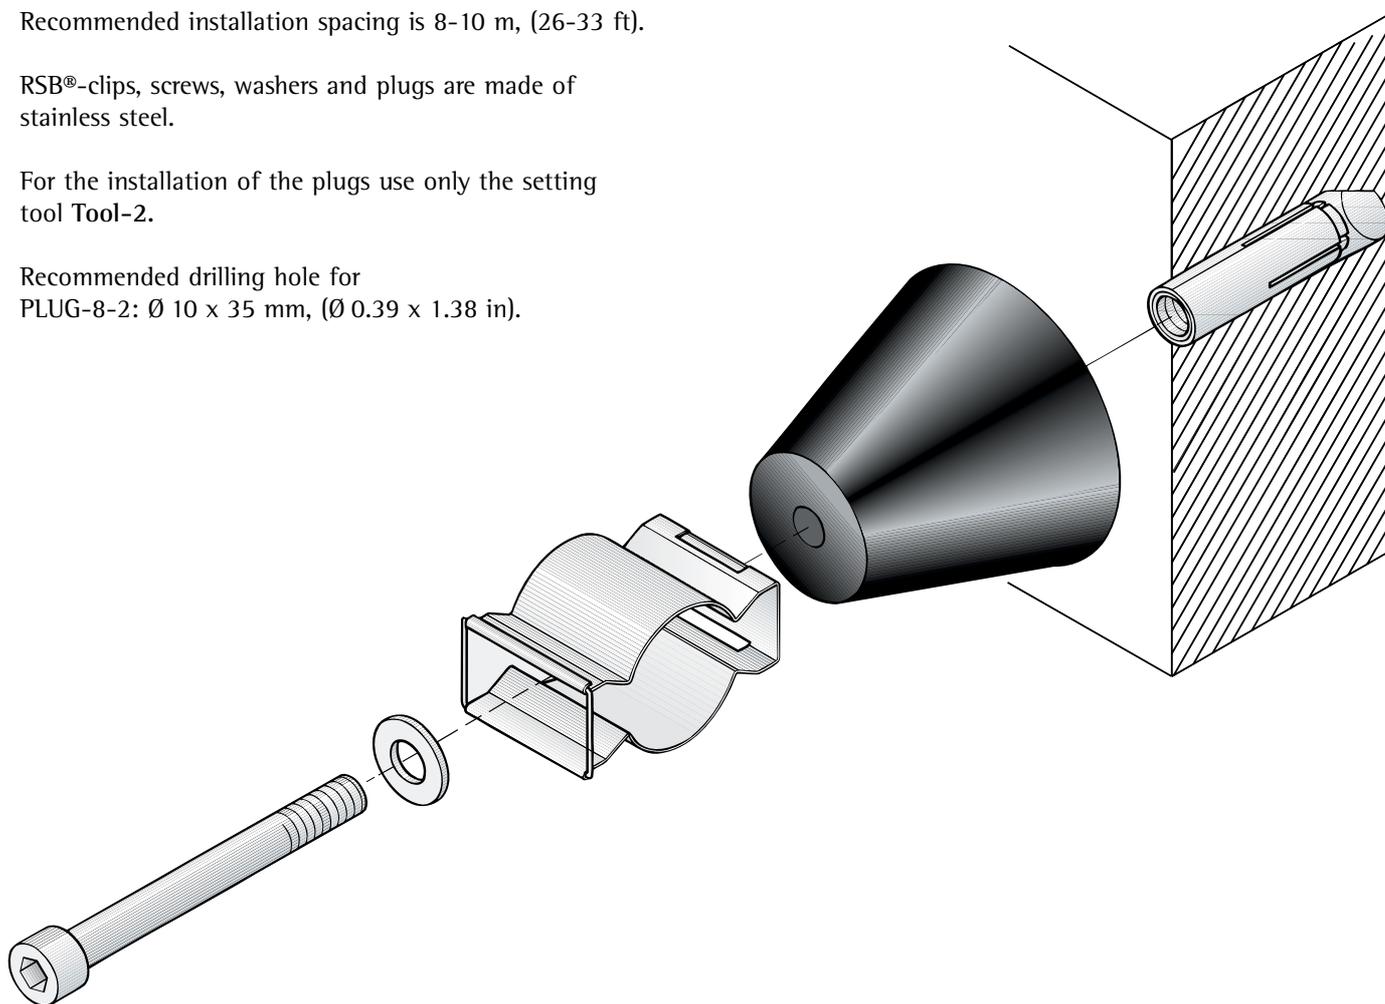

| Cable size | type | RSB-clip | Round base* | Installation with metal plug | | |
|------------|-------------------------|-------------|-------------|------------------------------|----------|--------|
| | | | | screw | plug | washer |
| 1/2" | ALF, RCF, RLK | RSB-12 | RB-50-4 | S-865-1 | PLUG-8-2 | W-84-1 |
| | | | RB-80-4 | S-895-1 | | |
| 5/8" | RLF, RAY, RLK | RSB-58 | RB-50-4 | S-865-1 | PLUG-8-2 | W-84-1 |
| | | | RB-80-4 | S-895-1 | | |
| 7/8" | RLF, RAY, RCF, RLK | RSB-78 | RB-50-4 | S-865-1 | PLUG-8-2 | W-84-1 |
| | | | RB-80-4 | S-895-1 | | |
| 1 1/4" | RLF, RAY, RCF, RLK, RLV | RSB-114 | RB-50-4 | S-865-1 | PLUG-8-2 | W-84-1 |
| | | | RB-80-4 | S-895-1 | | |
| 1 5/8" | RLF, RAY, RLK, RLV, RCF | RSB-158-001 | RB-50-4 | S-865-1 | PLUG-8-2 | W-84-1 |
| | | | RB-80-4 | S-895-1 | | |
| | | RSB-158 | RB-50-4 | S-865-1 | | |

* The hole of the round base has to be drilled to Ø 8.5 mm (Ø 0.36 in) before mounting the screw.